


RegO® - Relief Device Diverter (3-Way) Valve DR Series

Application

The DR Diverter Valve Series provides a simple solution for the isolation of pressure relief devices during routine change out of a relief valve without evacuating the vessel. Excellent for protecting bulk liquid vessels, transport trailers, industrial pipelines, and LNG systems.

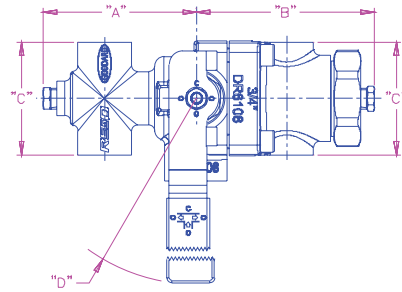


Features

- High flow rates complement our AR series pressure relief valves.
- Valve side selection is accomplished with a heavy duty control arm clearly labeled for positive isolation.
- RegO® needle valves accessorize for easy bleed of gas before removing pressure relief devices.
- Fitted with threaded top Relief Valve ports and bottom Burst Disk connections.
- Pressure Rating: 600 PSI (41.37 Bar) CWP
- Temperature Rating: -320°F (-196°C) to +165°F (+74°C).
- 100% Factory tested
- Oxygen cleaned per CGA G-4.1

Materials

Body Bronze ASTM B61 UNS C92200
 Bushing, End Cap..... Brass B16 C36000
 Seat Rings PCTFE ASTM D1430
 Gasket PTFE
 Ball..... 316 Stainless Steel
 Lever..... Cadmium Plated Steel
 Packing PTFE
 Stem Stainless Steel ASTM A582 UNS S30300

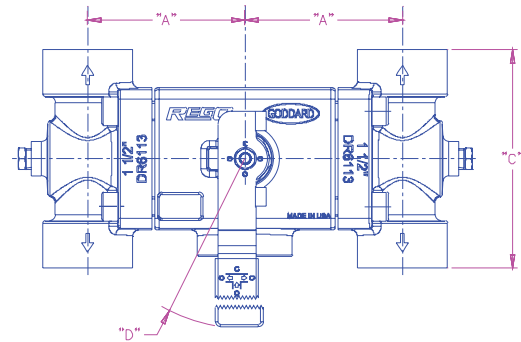

DR6108



DR6112 & DR6113



Ordering Information

Part Number	Inlet Inches DN (mm)	Outlet Inches DN (mm)	Connection Type	A Inches (mm)	B Inches (mm)	C Inches (mm)	D Inches (mm)	Height Inches (mm)	Weight Lbs (Kg)
DR6108	1"	3/4"	Thread NPT	4" (101.7)	4.65" (118.3)	2.94" (74.90)	R 7.36" (187.1)	5.18" (63.25)	10" (4.50)
DR6112	1 1/2"	1"		5.94" (150.9)	-	5.70 (145.0)	R 7.36" (187.1)	5.770" (146.6)	28" (12.70)
DR6113	1 1/2"	1 1/2"		5.94" (150.9)	-	5.70 (145.0)	R 7.36" (187.1)	5.770" (146.6)	30" (13.60)