


SHERWOOD VALVE COMPRESSED GAS PRODUCTS

CHLORINE GAS VALVES

Parts & Accessories

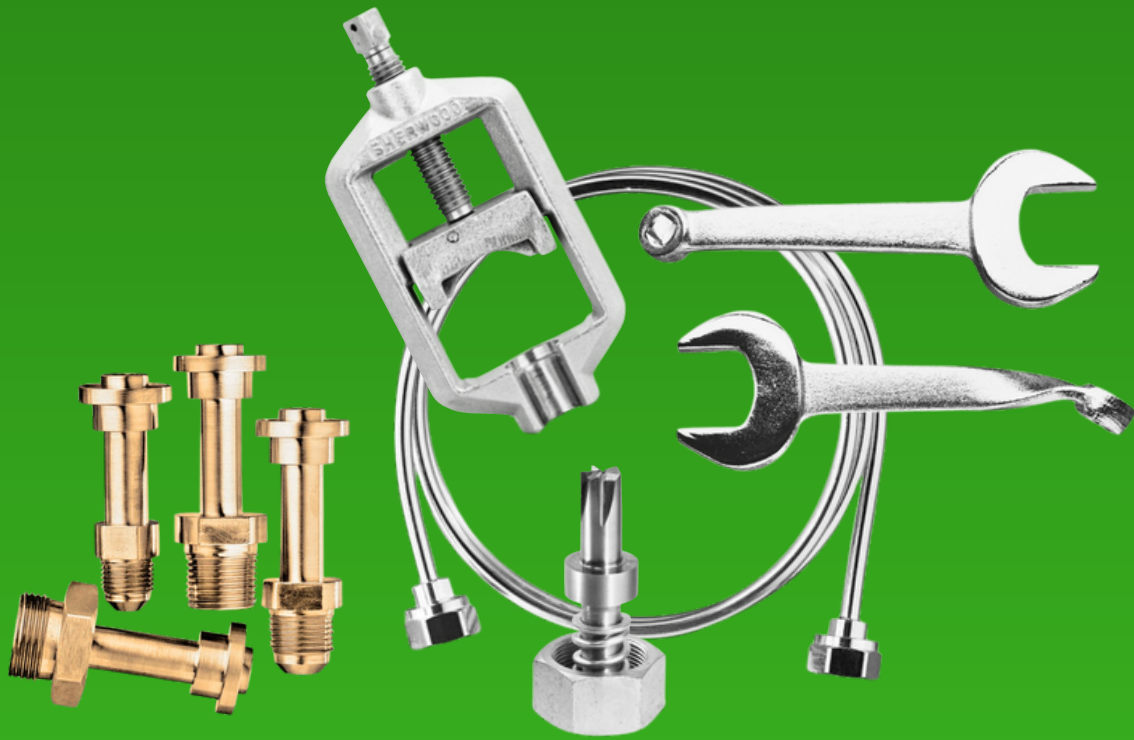

Fusible Plugs

- Manufactured in accordance with Chlorine Institute specifications and CGA S-1.1
- Materials: Brass C48500 and 165° F fusible alloy

Fusible Plugs for Cylinder Valves

Part Number	Inlet Thread Size	Hex Size
5853T	1/8" NGT	7/16"

Fusible Plugs for Ton Container Valves

Part Number	Inlet Thread Size	Hex Size
1333-N1	3/4" NGT (CL)-1	1 1/4"
1333-N2	3/4" NGT (CL)-2	1 1/4"
1333-N3	3/4" NGT (CL)-3	1 1/4"
1333-N4	3/4" NGT (CL)-4	1 1/4"
1303-N1	1" NGT (CL)-1	1 1/4"
1303-N2	1" NGT (CL)-2	1 1/4"
1303-N3	1" NGT (CL)-3	1 1/4"

Yokes

- Complies with Chlorine Institute specifications and CGA V-1
- Material: Forged steel with zinc plating
- CGA 820 connection

Part Number	Description	Minimum Clearance
628B	Yoke Assembly	1 1/4"
P628A-2	Replacement Stem	1 1/4"
P628A-3	Replacement Slotted Follower	1 1/4"

1534 Refacing Tool

Increase the life of the valve with this easy-to-use, manually operated reseating tool

Part Number	Description
1534	For use with 1210 and 1214



Flex Connectors

- 3/8" OD, zinc-plated copper
- Working pressure 500 psig
- Provided with CGA 660 connector nuts for non-yoke applications

Part Number	Connectors/Length
6414X2C	CGA 820 x CGA 820; 4 ft.
6414C	CGA 820 x CGA 820; 6 ft.
6414X1C	CGA 820 x CGA 820; 10 ft.

High Flow Yoke Adapters

Material: Aluminum Silicon Bronze C64210

Part Number	Size
5888-6	CGS 820 x 3/8" SAE Flare
5888-D	CGA 820 x 1/2"-14 NPT (male)
5888-E	CGA 820 x 660

Gaskets for Yoke Adapters

Part Number	Size
P10-CLAL	Lead Outlet Gasket (.937" OD)
P10-G-T	PTFE Outlet Gasket (.937" OD)

Wrenches

- Designed for use with 1210/1214 and 1210A/1214A chlorine valves and yokes
- Material: Forged steel construction
- Size: 1 1/4" open end; 3/8" stem square

Part Number	Description
635	Straight Shaft
635X3	Twisted Shaft

